


Bertolini Pumps Specification Sheet



APL0220S

Poly 2020 VF Pump with 1 3/8" Spline

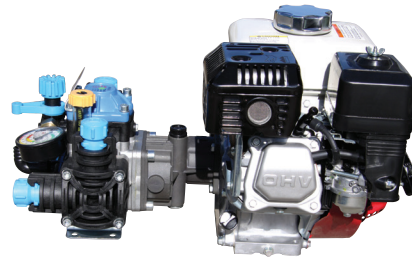

APL0220KG

Poly 2020 RT4 Pump & Regulator
with GX200 Honda Motor

2 Piston Semi-Hydraulic Diaphragm Pumps

MAX
FLOW

22
l/m

5.8
USGPM

MAX
PRESSURE

20
bar

290
PSI

Specifications

	R.P.M	R.P.M	650	650
Power	KW	HP	0.8	1.1
Weight	Kg	Lbs	5.6	12.3
Suction Lift - MAX	mt	ft	1	3.3
∅ Intake	mm	in	20	13/16"
∅ High Pressure	mm	in	10	3/8
MAX Temperature	°C	°F	60	140
Oil Type	SAE	W	SAE 30	30W
Oil Capacity	Lt	U.S.G	0.7	0.8

Flow Chart

R.P.M		550		600		650	
BAR	P.S.I.	l/min	KW	l/min	KW	l/min	KW
2	29	18.6	0.1	20.3	0.1	22	0.1
10	145	16.9	0.4	18.5	0.4	20	0.4
15	217.5	16.2	0.5	17.5	0.6	19.2	0.6
20	290	16.1	0.7	17.5	0.8	19	0.8

Features

- Poly pump designed to withstand the most aggressive chemical & acid solutions
- These 2 piston semi-hydraulic diaphragm pumps are ideal for gardening, small sprayers, washers and liquid transfer.
- Compact & light weight PTO & engine drive models
- All wet end parts are plastic coated for use with most agricultural spray materials and chemicals.
- Also available as a pump and gearbox configuration only – Part number APL0220KG