



Bertolini Pumps Specification Sheet



APL0340S

PA330 Pump with 1 3/8" Spline

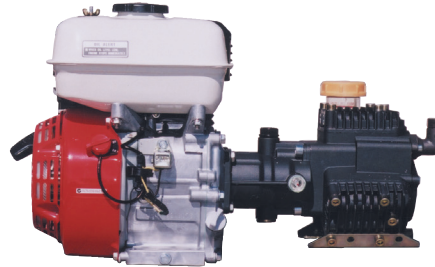

APL0340KGH

PA330 Pump with GX200 Honda Motor

3 Piston Semi-Hydraulic Diaphragm Pumps

MAX FLOW	34 l/m	9 USGPM
MAX PRESSURE	40 bar	580 PSI

Specifications				
	R.P.M	R.P.M	650	650
Power	KW	HP	2.5	3.4
Weight	Kg	Lbs	7.3	16
Suction Lift - MAX	mt	ft	1.5	4.9
∅ Intake	mm	in	24	1"
∅ High Pressure	mm	in	G 1/2	G 1/2
MAX Temperature	°C	°F	40	104
Oil Type	SAE	W	SAE 30	30W
Oil Capacity	Lt	U.S.G	0.6	0.16

Flow Chart									
R.P.M		400		450		500		550	
BAR	P.S.I.	l/min	KW	l/min	KW	l/min	KW	l/min	KW
2	29	26.5	0.1	29	0.11	31.5	0.12	34	0.14
20	290	25	1	27.5	1.1	30	1.2	32	1.3
30	435	24.5	1.5	27	1.6	29.5	1.8	31.5	1.9
40	580	24	2	26.5	2.2	29	2.4	31	2.5

Features

- Triple Diaphragm pumps engineered for smoother and quieter operation
- Stainless steel check valves, all other wet end components anodized for durability
- PTO and engine drive models
- Also available as a pump and gearbox configuration only – Part number APL0340KG