

The Home Protection Unit Specification Sheet



AFR3500ZH

Fire Protect Pump Kit

Unit Specifications

Item	Type	Details
Pump	Fire Scout APF3500Z	390 litre/min max flow volume, with max head 72m and suction head 8m. 3 way outlet. Camlock fittings for quick coupling
Hose	36 metres x 19mm	36 metres AS1221 rated, 19mm fire hose with adjustable nozzle. Fitted to hose wrap for easy storage
Bottom fill kit	6 metres x 38mm	6 metre suction hose with float strainer and camlock coupling for drawing from external water source
Frame	Hot dipped galvanised steel frame	Includes tie down points and hose wrap facility
Dimensions	Frame only	750mm (L) x 785mm (W) x 615mm (H)
Weight	AFR3500ZH with hose	50kgs

1

The Home Protection Unit Specification Sheet

The Home Protection Unit

Essential backup protection when fire threatens

Ember attack is a big threat to homes during a bushfire. An effective way of handling this is an essential part of any fire plan. Once hydrants start to be used and power outages occur, an independently powered unit accessing existing water supplies can save the day.

Features

- Reliable GX160 Honda engine with 3 year warranty
- 1 1/2" Fire Scout pump with camlock fittings for quick coupling
- 36m x 19mm hose with adjustable nozzle and hose wrap facility for easy storage
- Heavy duty hot dipped galvanised steel frame with tie down points
- 6m suction hose with foot strainer and camlock coupling for drawing down from external water source
- Quickly accesses domestic water tanks, pools, dams or other water sources to defend your property

Motor Specifications


Engine Specs	Description	Max Power	Continuous Power	Dry Weight	Fuel Tank Capacity	Oil Type	Oil Capacity	Electric Start
Honda GX160	Single cylinder petrol with oil alert	4.8hp @ 3600rpm	3.9hp @ 3600rpm	15 kg	3.6 litres	10W/30	0.6 litres	No

Pump Kits – Standard Fire Kits

Pump Model	Max Head	Max Flow	Powered By	Weight	Dimensions
APF3500Z	72m	390LPM	Honda GX160	24.2kg	380(H) x 385(W) x 480(L)

Pump Construction / Standard Features

- 1 x 1 1/2" suction port
- 1 x 1 1/2" discharge port
- 2 x 1" discharge port
- Oil sensor
- 3-way outlet
- Suction head 8m
- Max head 72m
- Max flow volume 390L/min
- Heavy duty powder coated skid with anti-vibration mounts

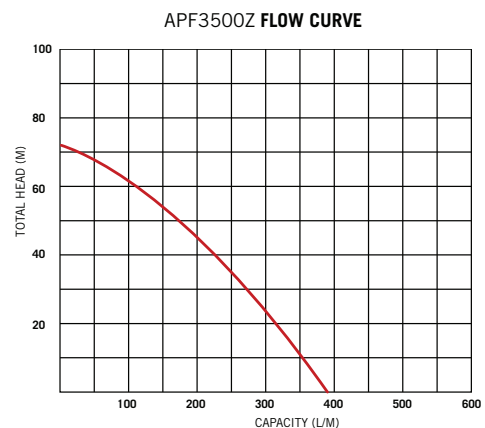

Essential Backup Protection When Fire Threatens

Freecall 1800 011 000
www.rapidspray.net

