

SPRAYSCOUT

360L / 600L ULTRA COMPACT FIELD SPRAYER



Twin Buddy Smart Reel® Version
360L



Single Buddy Smart Reel® Version
360L



Single Buddy Smart Reel® Version
600L

360L & 600L SprayScout

SPRAYER SPECIFICATIONS

Item	Description	Details
Tank	360L 600L	UV stabilised chemical resistant polyethylene tank with integral sump. 15 year guarantee. AS2070:1999 compliant
Mounting	Frame	Galvanised forklift pockets and moulded lifting and tiedown handles
Pump	Maruyama	33L/min 580 psi max, Triplex piston pump with 3 year warranty
	Bertolini	54L/min 580 psi max, 3 diaphragm semi-hydraulic pump with 1 year warranty
Motor	Honda GX200	4 stroke, overhead valve, single cylinder. 4.1kW @ 3600rpm. 3 year warranty
	Kohler CH270	4 stroke, overhead valve, single cylinder. 5.2kW @ 4000rpm. 3 years warranty
Regulator	Brass or Nylon	3 outlets, pressure gauge, easy adjustment
Hose Reel	Single or Twin 30/50m manual	UV stabilised poly hose reel on galvanised steel frame, full flow ball bearing swivel, brass components, reel lock, rotating handle
	Single or Twin 50/100/150m auto reel	Buddy Smart Reel - 12/24V auto rewind hose reel with My-pace multiple speed remote, overrun protection, low voltage cut-out
Spray Hose	10mm agricultural hose	High flexibility, kink resistant, burst pressure 150 bar (2200 psi), working pressure 40 bar (580psi)
	High pressure nylon hose (auto reel)	low friction, kink resistant, working pressure 40 bar (580 psi)
Rinse & Flush Tank	Built-In	17L tank plumbed with 3-way valve to pump suction and with handwash tap on side
Filter	1¼" or 1½"	32 mesh screen filter, auto shut-off system for easy cleaning with full tank
Lid	250mm (2)	Threaded lid assembly with fixed labyrinth breather valve, UV stabilised
Drain	1¼"	High volume quick drain located at front (pump end) of tank


Tank Capacity	Length	Width	Height
360L	910mm	1100mm	840mm
600L	1300mm	1100mm	840mm

ACCESSORIES

POLY BOOMS

Unique poly boom with built-in toughness means extra ordinary durability and rough country spraying capability.


- Heavy duty UV stabilised poly
- 110° low drift nozzles
- Adjustable mounting brackets
- Spring loaded breakaways
- Teeject compatible nozzle caps

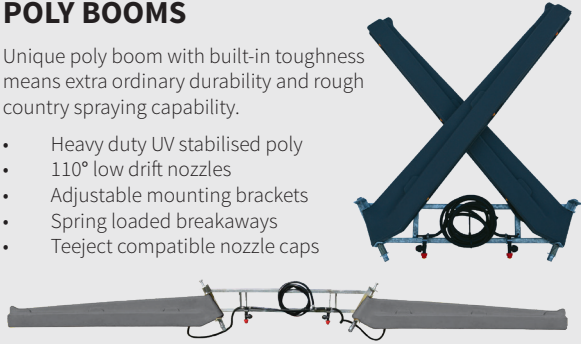

STEEL BOOMS

Cover quicker ground with the range of target broom sprays. Available in 6m, 8m or 10m booms.

- Low drift nozzles (standard)
- Galvanised steel construction
- Spring loaded breakaways
- Built-in nozzle protection
- Non-drip nozzles

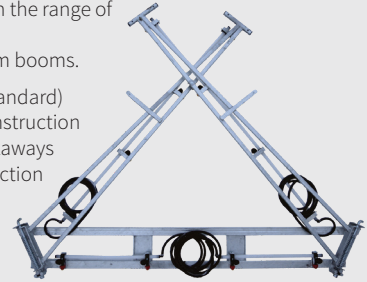

UTV HITCH BOOM MOUNT

- Easy ATV mounting system with 90° angle design for versatility
- Powder coated steel construction guarantees superior load bearing



FOAM MARKER

- Double sided with solenoid controls
- In cab controller for left/right
- 24L high strength poly tank
- 330L/hr foam production
- 0.75bar at 12V
- Pressure relief set at 1bar
- Water/foam agent solution 10.6L/hr
- Foam spreader made of flexible EPDM rubber
- 33m of hose



MIXER BIN

- Side mount steel frame
- 3-way valve bank
- Mixing nozzles
- Ball valves
- Suction venturi
- Hose to fill tank



QUICK FILL KIT

- 6m x 32mm suction hose
- Quick fill/venturi agitator
- Floating filter

