


3400L ACTIVE LOW PROFILE SPRAY TANK

PRODUCT SPECIFICATION SHEET

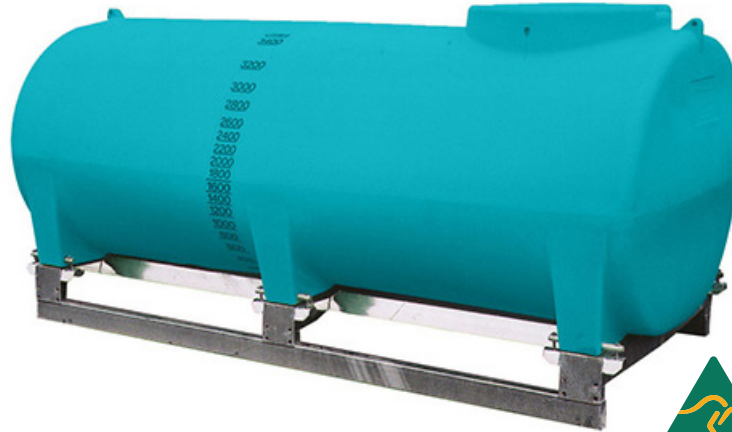

UNIT SPECIFICATIONS

Item	Description	Details
Tank	3400L	UV stabilised chemical resistant polyethylene tank, Complies with AS2070:1999 & AS4766:2006, Integral fully draining sump, 25 year warranty. Made in Australia
Lid	450mm	450mm screw lid fitted with spring breather valve and gasket
Tank Outlet	2" Croc-Loc	Stainless steel bolted flanged tank fitting
Colour	Teal	<i>*Note that tank colour can be customised</i>
Load Rating		1.3 Specific Gravity (SG)
Ball Baffles	ARB355 (Optional)	85 x ARB355F, Made from food grade polypropylene
Mounting Pins	Galvanised steel mounting frame and straps	Hot dipped galvanised steel mounting frame for correct tank support and to give sump clearance for access

TANK MODELS

Product Code	Model Variant / Type	Dimension	Dry Weight
PTSP03400TT	Tank only	2960mm (L) x 1450mm (W) x 1280mm (H)	170kg
PTSP03400KTT	Tank with frame fitted	2960mm (L) x 1450mm (W) x 1330mm (H)	350kg



DISCOVER
SAFER
TANKERS
WITH BALL
BAFFLES.
SCAN NOW!

