

# FIRE RANGER DUAL AXLE TRAILER

1200L / 1500L / 2000L / 2500L ADR COMPLIANT

## PRODUCT SPECIFICATION SHEET




5000 L x 2150 W x 1620 H

### SPECIFICATIONS

Item	Description	Details
Type	Road	Fitted with LED lights, reflectors, brakes & compliance plate - to ADR standards
Chassis		Fully welded RHS steel - hot dip galvanised, chequer plate mudguards
Running Gear	Axles	Dual, 45mm square, mounted over 6 leaf springs
	Wheels	Wheels All sizes 15" x 7" Steel rims, 6 stud Landcruiser hub pattern
	Tyres	Brand new, All Terrain Light Truck, 6 ply radial tyres, 31 x 10.50R16
Brakes	Electric	Electrically operated drum brakes with safety breakaway & handbrake
Towing		50m ball hitch, 12 pin flat plug, rated safety chain
Aggregate Trailer Mass (AGM)		3000kg

### DIMENSIONS

SIZE	L (mm)	W (mm)	H (mm)
1200L	5000	2150	1410
1500L	5000	2150	1600
2000L	5000	2150	1620
25000L	5400	2150	1810

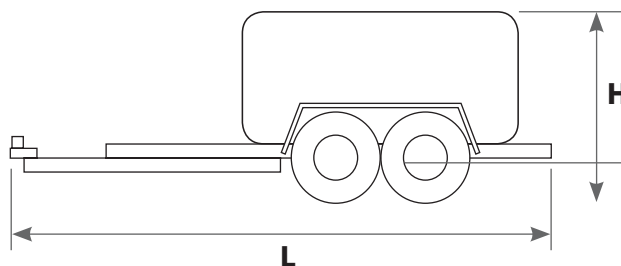

# FIRE RANGER DUAL AXLE TRAILER

1200L / 1500L / 2000L / 2500L ADR COMPLIANT

## PRODUCT SPECIFICATION SHEET



### FIRE KITS

- Poly reel with galvanised steel mounting frame fitted with 36metres x 19mm fire hose (AS1221) & adjustable fire fighting nozzle.
- Full flow brass swivel fitted to reel
- Bottom fill kit – 6 metres of hose and suction filter
- Camlock fittings used standard – 1 1/2"

### PUMP CONSTRUCTION / STANDARD FEATURES

- 2" replaceable suction port / 2x1" and 1x1.5" replaceable discharge tree with metal threaded covers attached with metal chains
- Cast aluminium pump body
- Self-priming to 7.6m
- Heavy duty powder coated skids with anti-vibration mounts
- 7.5"Ø single piece cast aluminium impeller
- 5 year limited warranty

### MOTOR SPECIFICATIONS

Engine Specs	Description	Power	Dry Weight	Fuel Tank Capacity	Oil Type	Oil Capacity	Electric Start
Honda GX160	Single cylinder petrol	4.8HP @ 3600 rpm	15.1kg	3.1L		0.6L	Yes



### PUMP KITS

Pump Model	Pump Type	Max Pressure	Max Flow	Weight	Warranty
RapidPro Fire Pump	Diaphragm	40 bar 580psi	450L/min	14kg	5 years