

FIRE MARSHAL SINGLE AXLE TRAILER

1000L ON-FARM / ON-ROAD

PRODUCT SPECIFICATION SHEET




3480 L x 1770 W x 1375 H

SPECIFICATIONS

Item	Description	Details
Type	Farm	Standard trailer fitted with tail, brake, indicator and number plate lights
	Road	Additional hydraulic brakes
Tank	1000L	UV stabilised polyethylene tank, 455m hinge lid with anti-spill lip
Chassis		Hot-dipped galvanised steel, chequer plate mudguards
Running Gear	Axles	2T rated axle and leaf springs
	Wheels	14 inch wheels with Ford hub pattern
	Tyres	All terrain road tyres
Brakes		Hydraulic brakes
Towing		50mm tow hitch ball coupling and swing-away jockey wheel Comes with the standard chains and D bolts
Aggregate Trailer Mass (ATM)		1450kg

DIMENSIONS

SIZE	L (mm)	W (mm)	H (mm)	Dry Weight (kg)
1000L	3480	1770	1375	450

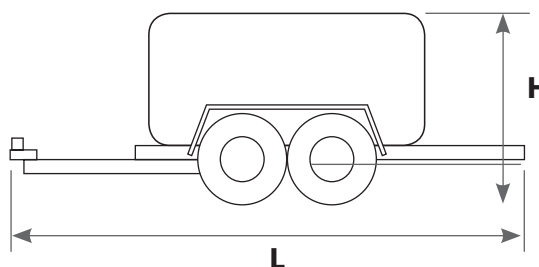

FIRE MARSHAL SINGLE AXLE TRAILER

1000L ON-FARM / ON-ROAD

PRODUCT SPECIFICATION SHEET



FIRE KITS

- Poly reel with galvanised steel mounting frame fitted with 36metres x 19mm fire hose (AS1221) & adjustable fire fighting nozzle.
- Full flow brass swivel fitted to reel
- Bottom fill kit – 6 metres of hose and suction filter
- Camlock fittings used standard – 1 1/2"

PUMP CONSTRUCTION / STANDARD FEATURES

- 2" replaceable suction port / 2x1" and 1x1.5" replaceable discharge tree with metal threaded covers attached with metal chains
- Cast aluminium pump body
- Self-priming to 7.6m
- Heavy duty powder coated skids with anti-vibration mounts
- 7.5"Ø single piece cast aluminium impeller
- 5 year limited warranty

MOTOR SPECIFICATIONS

Engine Specs	Description	Power	Dry Weight	Fuel Tank Capacity	Oil Type	Oil Capacity	Electric Start
Honda GX200	Single cylinder petrol	5.8HP @ 3600 rpm	16.1kg	3.1L	SAE 10W-30*	0.6L	Yes

*recommended oil type can vary depending on ambient temperature



PUMP KITS

Pump Model	Pump Type	Max Pressure	Max Flow	Weight	Warranty
RapidPro Fire Pump	Diaphragm	40 bar 580psi	450L/min	14kg	5 years