

Silver Selection Sprayers Specification Sheet



SVS0034L0038



SVS0055L0038



SVS0095L0038

12 Volt Sprayers with Delavan 3.8l/min 40psi Pumps

Unit Specifications		
Item	Description	Details
Tank	34 Litre 55 Litre 95 Litre	UV stabilised polyethylene tank. Made in USA
Pump	Delavan 12 volt (3.8 L/min 40psi)	Delavan 12VDC positive displacement, self priming. Pressure demand switch. Max pressure 40psi (2.8bar). 3.8 L/min open flow. Viton valves, santoprene diaphragm. Capable of being run dry
Filter	Two stage	10mm suction foot filter, basket filter fitted in SVS0034L0038 Lance handle filter
Spray Lance	AHL009	Lightweight chromed aluminium with adjustable spray nozzle and filter in handle. 850mm overall length with 10mm hose barb connection
	AHL008	Spray lance, overall length 800mm, max pressure 4 bar (60psi) to suit SVS0034L0038 with adjustable nozzle
Spray Hose	4.5 metres x 10mm	Agricultural spray hose – high flexibility, kink resistant. Coiled hose on SVS0034L0038
Lid	150mm	150mm screw lid with tether and breather
Power Source	12 volt	2.4 metre 12 volt electrical leads with switch and alligator clips
Drain	Drain plug	Threaded drain bung with cap and seal and anti-loss strap

1

Compact and easy to use Spot Sprayers – ideal for larger gardens

Silver Selection Sprayers Specification Sheet

Tank Specifications

Code	Tank Size (Litres)	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
SVS0034L0038	34	475	375	400	6
SVS0055L0038	55	865	390	345	7
SVS0095L0038	95	865	390	435	8

Motor Specifications


Pump Model	Motor	Liquid Temp	Priming Capabilities	Max Pressure	Housing	Valves	Diaphragm	Fasteners	Weight (kg)
APD0038	Permanent magnet thermally protected, splash proof	43°C	1.2m	40psi (2.8 bar)	Polypropylene	Viton	Santoprene	Stainless steel & zinc plated	0.57

Features

- 34 litre comes complete with tie down straps
- Tanks calibrated for easy measurement of contents
- Easy cleaning tank design with drain plug
- Spray lance clips for secure lance storage
- Lid comes complete with anti-loss strap
- Reliable 3.8L/min 40psi pump ideal for spot spraying
- Made in the USA


Pump Performance

- APD0038 3.8L/min (40psi)

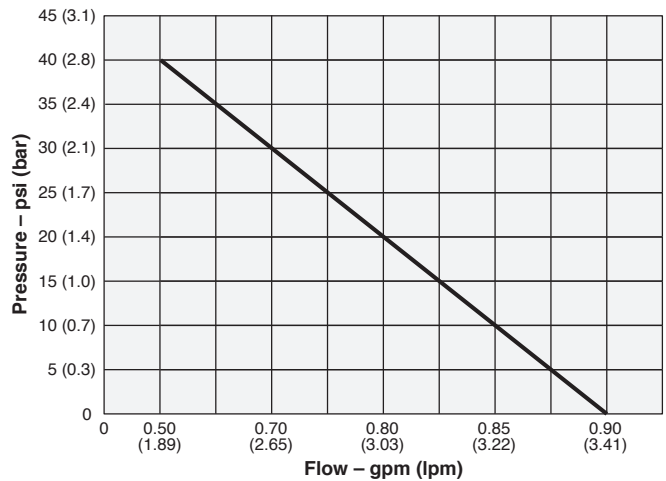

2

Pump Dimensions (mm)

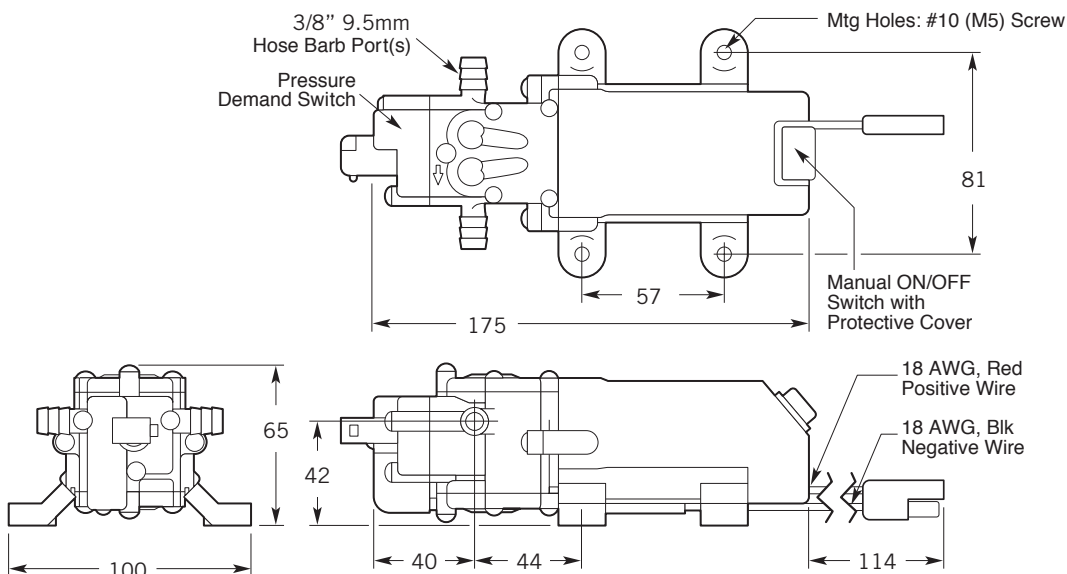


Silver Selection Sprayers

Specification Sheet

Parts Breakdown

– SVS0034L0038 34 LITRE SPOT SPRAYER

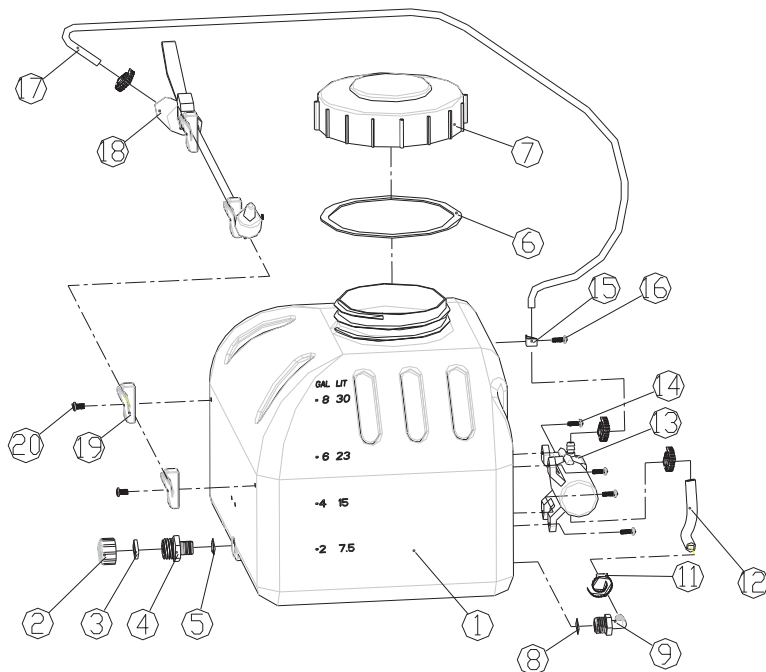

Parts List – SVS0034L0038


3

No.	Part No.	Description	Per. Set
1		Tank 34 litre	1
2	3N34	Cap, Garden hose	1
3	W406-U	Washer, Garden hose	1
4	E3412	Fitting 3/4" MGHT x 1/2" MNPT	1
5	Not Available	Gasket	1
6	TL-6B-GAS	Gasket, Tank lid	1
7	ARLP150AT	Lid, Tank	1
8	Not Available	Gasket	1
9	EL12	Fitting, 90 deg, 1/2" MPT x 1/2" HB	1
10	TDS-9GSS	Tie down straps (not shown)	1
11	350-005	Clamp, hose	4
12	33-103939	Hose, vinyl	152 mm
13	APD0038	Pump, Delavan 3.8 L/min (40psi)	1
14	33-103126	Screw, machine 10-24 x 5/8	4
15	Not available	Strain relief	1
16	Not available	Screw 10-24 x 1/2"	2
17	33-103938	Hose, vinyl	3 metres
18	AHL008	Wand with filter	1
19, 20	CHCLP12MMX2	Clip, gun (pair)	1
21	ATCWL02412VSA	Harness, wire, SS (not shown)	1
22	SS-MANUAL-MM	Manual (not shown)	1

Silver Selection Sprayers Specification Sheet

Parts Breakdown

– SVS0055L0038 & SVS0095L0038 – 55 & 95 LITRE SPOT SPRAYERS

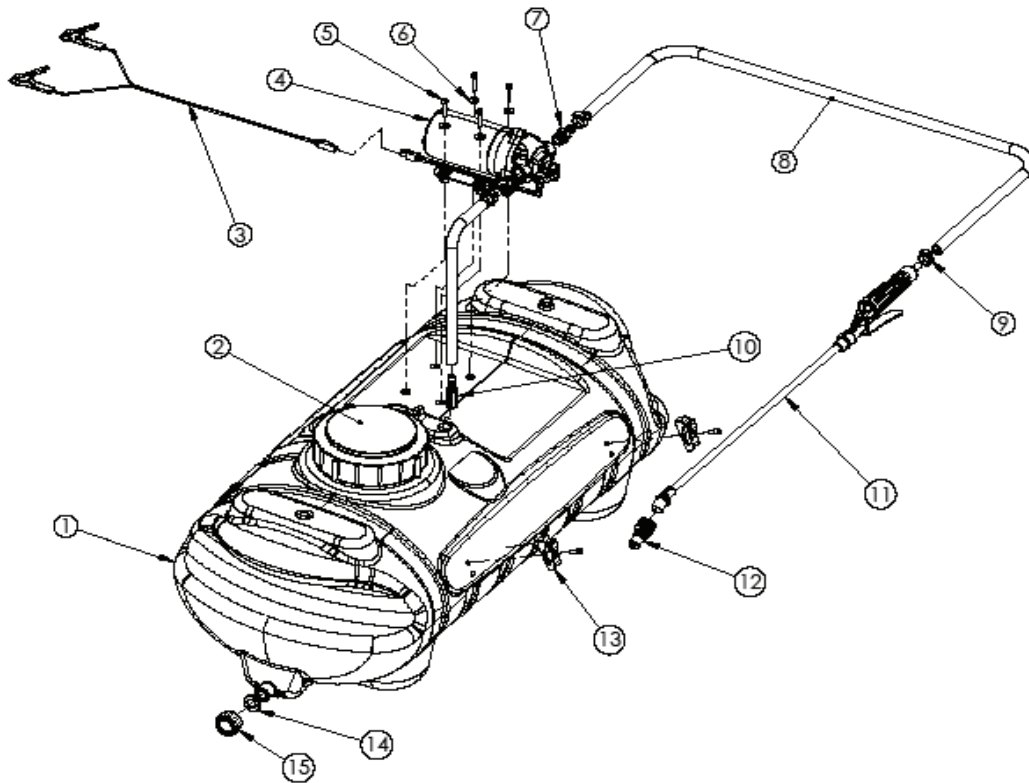

Parts List – SVS0055L0038 & SVS0095L0038 – 55 & 95 LITRE SPOT SPRAYERS

4

No.	Part No.	Description	Per. Set
1	33-103231	Tank 55 litre	1
	33-103230	Tank 95 litre	1
	33-103245	Tank 150 litre	1
	33-103246	Tank 225 litre	1
2	ARLP150AT	Lid, Tank	1
3	ATCWL02412VSA	Harness, wire, SS	1
4	APD0038	Pump, Delavan 3.8 L/min (40psi)	1
	APD0077T10E	Pump, Delavan 7.7 L/min (60psi)	1
5	33-103126	Screw, machine 10-24 x 5/8, 3.8 LPM pumps	4
	33-103127	Screw, machine 10-24 x 1", 7.7 LPM pumps	4
6	33-103131	Washer #10, 7.7 LPM pumps only	4
7	A38	Fitting, 3/8"MNPT x 3/8"HB 7.7 LPM pumps	2
8	3204-1407	Hose, rubber, 3/8"	4.5 metres
9	SHC-F	Clamp, hose	3
10	33-103121	Strainer, inlet	1
11	AHL009	Wand with filter	1
12	CPLP009N	Nozzle, assembly	1
13	CHCLP12MMX2	Clip, Gun (pair)	1
14	W406-U	Washer, Garden hose	1
15	ATPVC20T	Cap, Garden hose	1
	3204-1407	Hose, rubber, 3/8", intake, 15/55 (G/L) & 25/95 (G/L) tanks	533mm
	3204-1407	Hose, rubber, 3/8", intake, 40/150 (G/L) & 60/225 (G/L) tanks	711mm